

Mira EnergySaver Elite

NEW 2" PORTED PLATE HEAT EXCHANGER

The new 2" ported Mira plate exchanger from SPX FLOW is designed to cover a wide range of applications and secure even better solutions for customers in the energy and industrial segments.

By implementing research developed over the past 10 years we can now deliver an even more cost effective heat exchanger with a superior ratio between plate thickness and pressure rating, leading to one of our most thermally efficient heat exchangers to date.


Frame dimensions:

The Mira platform consists of two plate lengths (M8 and M13)

FRAME	WIDTH IN MM (IN)	HEIGHT IN MM (IN)
M8-EA020A	305 (12)	536 (21)
M8-EA030A	326 (13)	536 (21)
M13-EA020A	305 (12)	786 (31)
M13-EA030A	326 (13)	786 (31)



	FEATURE	ADVANTAGES	WHAT'S IN IT FOR YOU!
A	INTER PLATE LOCKING SYSTEM INTEGRATED IN HANGING EYE	IMPROVED PLATE PACK STABILITY, WITH EXTREMELY MINIMAL LOSS OF HEAT TRANSFER AREA.	<ul style="list-style-type: none"> SAFE AND ECONOMIC OPERATION SIMPLE AND EFFICIENT SERVICEABILITY MINIMUM SERVICE DOWNTIME
B	GRADUATED CHOCOLATE BOX DISTRIBUTION	BETTER THERMAL PERFORMANCE OF PLATE -> REDUCTION IN M ² OF REQUIRED HEAT TRANSFER AREA AND IMPROVED PERFORMANCE	<ul style="list-style-type: none"> PREVENTS MAL-DISTRIBUTION
C	NEW DOUBLECLIP GASKET AFFIXING SYSTEM	IMPROVED GASKET STABILITY AND REDUCED RISK OF GASKET BLOWOUT. EASY REMOVAL AND REPLACEMENT OF GASKET.	<ul style="list-style-type: none"> RELIABLE OPERATION EASY AND QUICK TO REPLACE NO SPECIAL TOOLS NEEDED
D	CORRUGATED PLATE PATTERN - HEAT TRANSFER AREA	PROMOTED TURBULENCE, MINIMIZES FOULING	<ul style="list-style-type: none"> EXCELLENT HEAT RECOVERY EFFECT MAXIMIZES RUN TIME

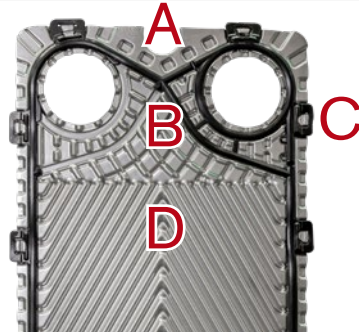

GENERAL SPECIFICATIONS

Design:

Industrial frame, painted to RAL 5010 Blue

	PED	ASME
DESIGN CODE:	PRESSURE EQUIPMENT DIRECTIVE PED EN 1.3445	ASME VIII DIV1
TEMPERATURE:	UP TO 150°C AND UP TO 16 BAR WITH APPROPRIATE SELECTIONS	UP TO 350 PSI AND UP TO 300°F DESIGN WITH APPROPRIATE SELECTIONS

Materials:

Plates: Stainless steel EN 1.4404(AISI316L)

Gaskets: NBR per. (FDA) and EPDM Res. High Temperature (ParaTemp2)

Connections: 50mm 316L Pipe/50mm ISO Parallel Thread, EN 1.4404 (AISI316L)

TYPICAL APPLICATIONS

- Hot/Chilled water
- Water/Water
- General heating and cooling duties
- Central heating
- Water/Oil

SPXFLOW

SPX FLOW TECHNOLOGY Nordager 2, 6000 Kolding, Denmark

P: +31 65 181 22 11 | E: ft.kolding.hex.sales@spxflow.com | W: www.spxflow.com/apv

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green "x" and "x" are trademarks of SPX FLOW, Inc.

APV_Mira_GB Version: 08/2019

COPYRIGHT © 2019 SPX FLOW INC.



REPRESENTATIVE SWEDEN: CAMpreq AB Box 9123, 400 93 Göteborg

P: +46 31 720 24 66 | E: info@campreq.se | W: www.campreq.se